

Operator's Product HandBook

StandBy10[™] & BackUp16[™]

Knapsack & Portable Fire Fighters





"HELPING TO DEVELOP AND PROTECT THE LAND"



Contents

Contents	2
Introduction	3
Your Safety	3
Risk Assesment	4
Operating Instructions	5
Maintenance	5
Parts List	6
Warranty	9-10

Disclaimer

All information, illustrations, and specifications contained in this manual are based on the latest product information available at the time of this publication's printing. TransTank International (TTi) reserves the right to alter and substitute specifications and methods at any time, in line with our commitment to continuous improvement.

No patent liability is assumed with respect to the use of information contained within this manual. While every precaution has been taken in the preparation of this manual, TTi assumes no responsibility for errors or omissions.

Thank you for your purchase of a BackUp 16[™] or StandBy10[™] which is complete and ready to use.

Introduction

Please carefully read your operators handbook before mounting & using your Backup16 or Standby10. Keep your handbook in a safe place.

These highly efficient and portable fire fighters are your first defence for ember suppression, managing spot fires and burning off. They feature a reliable, double action hand pump with an adjustable nozzle. Twin one-way valves prevent syphoning or leakage when not in use.

The robust, ergonomic tanks are designed to withstand rough handling associated with fire situations.

Your Safety

To ensure your own safety and that of your employees if applicable you must comply with

all relevant environmental, work place health and safety legislation and codes of practice. In particular, be aware of Rural Fire Service guidelines for safety when fighting fires or backburning.

Select and wear appropriate Personal protection Equipment in accordance with the label of the product you intend using and your own safe work practices.

You must be in good mental health to operate this sprayer and not be under the influence of alcohol or any drugs that could impair your vision, physical strength, dexterity, judgment, or other mental capacity

All operators must be trained in safe use of this unit



Risk Assesment

Product Information Risk Assessment Sheet TTi - Diesel Tanks

TASK	HAZARDS	RISK	CONTROL MEASURES
Partially fill the tank with water, start the motor & test the spray unit	Manual handling; slips, trips or falls; petrol; fumes; fingers jammed; electric shock or Electricity.	Med	 Concentrate on task; Follow safe manual handling techniques: Don't lift on your own if > 20kg, bend knees & keep back straight; Keep fingers clear; keep unit at least 8m away from overhead powerlines; Ensure AS 3760: 2001 Testing Electrical Equipment applies; Water away from electrical sources.
Check weather conditions & select the appropriate PPE to suit the chemicals to be used	Manual handling; slips, trips or falls	Low	 Put on PPE as per the chemical requirements in the Material Safety Data Sheet-coveralls, gloves, safety footwear, glasses & respirator; Follow safe manual handling techniques: don't lift on your own if >20kg, bend knees & keep back straight.
Mix chemicals (if applicable) & fill spray tank/fire fighting unit	As above; spray drift, chemical spillage, emission of vapors or flammability; weather; untrained visitors	Med	 As above; User trained in the state's chemical mixing & administration course eg Chem. Cert; Follow the relevant Environment Protection Authority requirements; Fire extinguisher present; Keep visitors away from the job unless wearing full PPE.
Use spray or fire fighter units.	As above; loss of load; heat & cold; noise; exceed load limit of vehicle; hose	High	 As above; Wear clothes to suit heat & cold; Wear hearing protection if noise > 85 dBa; Follow the manufacturer's safe operation instruction for the vehicle and the spray unit; Don't overload - water weighs 1kg for every 1 litre; Secure load to vehicle; Keep hose tidy; Put unit brakes on
Clean up, maintenance & storage	As above	High	As above; Continue to wear PPE for clean up: Store unit in a dry, well ventilated area.

Operating Instructions

Before Use

Check all hoses, connections and hose clamps to ensure that the unit has been delivered to you without transportation loss or damage.

Before attempting any spraying with your new unit, operate it with water only to familiarize yourself with its features and capabilities and to ensure that your sprayer has arrived in a safe working condition.

Please contact your dealer immediately should anything appear to have been damaged.

Operation - BackUp16™

Fill tank from appropriate water source. Place the unit on a surface at the same height as your back. Slide one arm through a strap and stand upright while swinging the opposite arm through the remaining strap.

Tighten straps securely

To operate. Remove lance from storage position. Grasp the centre handle firmly and pull the front of the lance outward using the angled handle.

Aim the water jet at the base of the fire and continue pumping by moving handle in & out. Due to the double action pump mechanism water is pumped on both in & out stroke to deliver a consistent water jet.

Adjust nozzle by turning tip to achieve the desired spray pattern.

Operation - Standby10™

Your Standby10 is supplied with two spring steel mount brackets for easy mounting on any convenient location on your tractor or trailed equipment.

To mount unit, remove the clips from the tank & fasten securely to any suitable flat surface approx. 280 mm apart. Take care not to drill or screw thru any electrical cables, pneumatic or hydraulic lines which may be located on the underside of the fixing area.

After filling tank locate in clips by pushing down firmly.

To operate. Remove unit from storage clips with a firm upward pull. Grasp the centre handle firmly and pull the front of the lance outward using the angled handle.

Aim the water jet at the base of the fire and continue pumping by moving handle in & out. Due to the double action pump mechanism water is pumped on both in & out stroke to deliver a consistent water jet.

Adjust nozzle by turning tip to achieve the desired spray pattern. After use ensure tank is refilled before returning to storage position.

Please note that the unit is designed for fire fighting use and not for chemical spraying.

Please consult the manufacturer for further information.

Maintenance


Periodically unscrew knurled greasing cover [#812] on the lance, fill with grease & screw up again.

Periodically check all hoses, fittings and nozzle parts. Replace any worn or broken parts

When storing the unit ensure that it is clean and dry and store in a well ventilated place.



Parts List

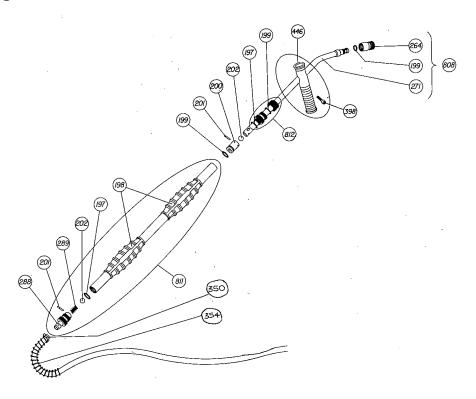

Lance Parts

No	Code	Description
197	8.39.04.303	Rubber Washer
198	8.39.04.306	Grip
199	2.23.15.911	Round Joint AN-11
200	8.39.04.009	Piston
201	8.39.04.005	Pin
202	2.20.08.010	Stainless eteel ball 10
264	8.39.08.017	Nozzle
271	8.39.08.620	Tube with Sprayer
288	8.39.08.002	Inlet Nipple
289	8.39.08.324	Spring
350	2.03.24.012	Clamp
354	8.39.08.327	100mm Spring
398	2.59.26.740	Screw
446	8.39.04.324	Grip
808	8.39.08.803	Tube with nozzle
811	8.39.08.801	Complete Body
812	8.39.08.805	Greasing Nipple





BackUp16 Parts

No	Code	Description	
1	YP1016	Fire fighting knapsack - tank only	
2	YP1000	Lance	
3	YP105	Filter basket	
4	YP286	Lid - no breather	
5	YP286B	Lid breather	
6	YP1002	1/2" rubber hose	
7	YP1005	Clip clamps	
8	YP1001	knapsack pick up tube	
9	STA69	8mm foot filter	
10	YP1003	3/8"bspm x 1/2" tail, nylon	
11	YP1010	Shoulder pad	
12	YP1011	38mm strap, per mtr	
13	YP1012	Plastic buckles	
14	BOX15	Packing box	





StandBy10 Parts

No	Code	Description
1	YFATM10TANK	Tank only - Tractor mount fire fighter
2	YFBKT	Mounting barckets - per pair
3	YP105	Filter basket
4	YP286	Lid - no breather
5	YP286B	Lid breather
6	YP1002	1/2" rubber hose, per mtr
7	YP1005	clip clamps
8	YP1007	Tractor mount pick up tube
9	STA69	8mm foot filter
10	YP1003	3/8"bspm x 1/2" tail, nylon
11	YP1000	Lance, complete
12	YP1006	Stainless steel lance strap
13	B14X1.12/R	1/4" x 1-1/2" roofing bolt
14	NN14	1/4" unc nyloc nut
15	BOX16	Packing box



Warranty

Your rights under the law

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law.

You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

About this document

This document sets out the terms of the defects warranty that we offer to retail purchasers of our goods, including components, parts, and accessories (referred to as "products" in this document). We offer this defects warranty in addition to the consumer guarantees referred to above. Nothing in this document excludes or reduces your rights under those consumer guarantees.

What this warranty covers

This warranty covers defects in materials or workmanship (or both) which are found to be present in our products, other than the defects in the parts and components listed below.

What this warranty does not cover

This warranty does not cover defects or damage caused by your negligence, your failure to follow instructions (including incorrect assembly or mounting by you), or the improper use, maintenance, or abuse of the products.

This warranty does not cover engines, gearboxes, pumps, or regulators. These come with separate warranties from their manufacturers. By offering this defects warranty, we do not assume any additional obligations or liability on behalf of those manufacturers beyond what we must do to comply with the consumer guarantees referred to above.

How long this warranty lasts for

Except in the case of products used for rental purposes, the period of our defects warranty is as follows for our various products:

Tanks (non-diesel), excluding frames	25 Years
Steel frames	5 Years
Other TTi Manufactured Components	1 Year

This warranty lasts for one year from the date of your retail purchase of the products, unless it is used for rental purposes, in which case this warranty is limited to 90 days.

What we will do if you make a claim under this warranty

If you make a claim under this warranty, we will consider it in good faith. If we agree that the products are covered by this warranty and are defective, we will either (at our option) repair or replace them without charge to you.





What you must do (and not do) to entitle you to a claim under this warranty

You must be able to provide proof of purchase, either by providing details of your warranty registration or a purchase receipt.

You must not repair or modify (or allow the repair or modification of) the products without prior authorisation from us. Further, you must not use any non-genuine parts with the products. Doing any of these things will void this defects warranty.

How to make a claim under this warranty

If you believe that you have a claim under this warranty, please contact your reseller, or contact us using the following details:

Name: Trans Tank International

Postal Address: PO Box 137 Nathalia, VIC, 3683

Physical Address: Murray Valley Highway, Nathalia, VIC, 3638

Phone: 1800 816 277

Email: ProductSupport@tti.com.au

You must make the defective products available for inspection by returning them to us, and (if requested to do so) by making them available for inspection by us on site beforehand. You must ensure that the products are made safe for transportation and inspection, including by cleaning them thoroughly to remove any chemical residues. All returned products must be accompanied by a completed Return Goods Note. Please contact us using the details displayed above for a copy of this document.

Who is responsible for expenses for claims made under this warranty

You are responsible for any expenses associated with the warranty claim, including transportation, charges made for service calls, and clean-up time.





SCAN HERE!

1800 816 277

sales@tti.com.au

PO Box 137, Nathalia, VIC, 3638 Murray Valley Hwy, Nathalia, VIC 3638

Proudly Built By:		Quality Checked By:	
Signature	Date	Signature	Date

www.tti.com.au